



ALU-POWER

SOLID CARBIDE END MILLS



YE-AP14



ALU-POWER

SOLID CARBIDE END MILLS

- *Mirror surface*
- *Excellent surface finishes*



YG YG-1 CO., LTD.

HEAD OFFICE

211, Sewolcheon-ro, Bupyeong-gu, Incheon, Korea
PHONE : +82-32-526-0909, FAX : +82-32-526-4373
<http://www.yg1.kr>
E-mail: yg1@yg1.kr

Tool specifications are subject to change without notice.


YG YG-1 CO., LTD.

ITEM	MODEL	DESCRIPTION	SIZE		PAGE
			MIN	MAX	
E5E47		CARBIDE, 1FLUTE	D2.0	D12.0	4
E5930		CARBIDE, 2FLUTE 25° HELIX CORNER RADIUS	D2.0	D20.0	5
E5E48		CARBIDE, 2FLUTE 45° HELIX SHORT LENGTH	D3.0	D20.0	6
E5522 E5521		CARBIDE, 2FLUTE 45° HELIX LONG LENGTH	D3.0	D20.0	7
E5909		CARBIDE, 2 FLUTE CORNER RADIUS WITH NECK	D4.0	D20.0	8
E5E50		CARBIDE, 3FLUTE 45° HELIX WITH NECK	D3.0	D20.0	9
E5E49		CARBIDE, 3FLUTE 45° HELIX LONG LENGTH	D3.0	D20.0	10
E5E51		CARBIDE, 3FLUTE 45° HELIX LONG LENGTH CORNER RADIUS	D3.0	D20.0	11
E5910		CARBIDE, 2FLUTE 50° HELIX BALL NOSE WITH NECK	R3.0	R10.0	12
E5908		CARBIDE, 3FLUTE 40° HELIX BALL NOSE WITH NECK	R1.0	R8.0	13
E5742 E5711		CARBIDE, 3FLUTE LONG LENGTH ROUGHING	D6.0	D25.0	14
E5E39 E5E40		CARBIDE, 3FLUTE ROUGHING WITH NECK	D6.0	D20.0	15
EP922 EP923		YPM, 3FLUTE 42° HELIX SHORT LENGTH ROUGHING TiAIN COATED	D12.0	D32.0	16
EP924 EP925		YPM, 3FLUTE 42° HELIX LONG LENGTH ROUGHING TiAIN COATED	D12.0	D32.0	17
RECOMMENDED CUTTING CONDITIONS					18

◎ : Excellent ○ : Good


Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Acrylic
-HB225	HB225-325	HRC30-40	HRC40-45	HRC45-55	HRC55-70							
									◎			◎
									◎			
									◎			
									◎			
							○		◎			
									◎			
									◎			
									◎			
							○		◎			
							○		◎			
○	○							○	◎			
○	○							○	◎			
								○	◎			
								○	◎			

Slotting

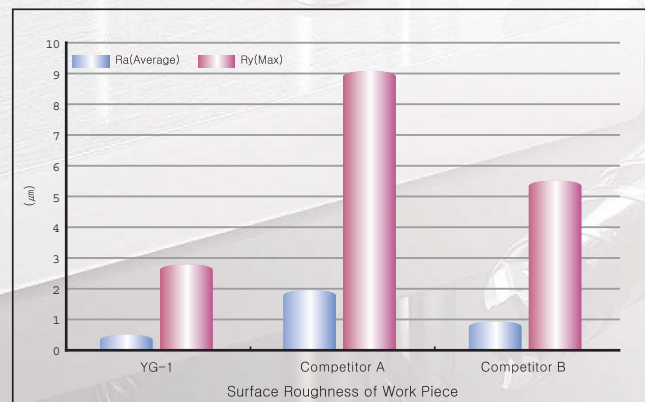

CUTTING CONDITION
Tool : 2 Flute, 45° Helix
Size : $\varnothing 10 \times \varnothing 10 \times 27 \times 70$
Work Material : Aluminum 6061
R.P.M : 7,500 rev./min.
Feed : 1,750 mm/min.
Depth : $A_p(3mm) \times A_e(10mm)$
Coolant : Wet Cut

Side Cutting

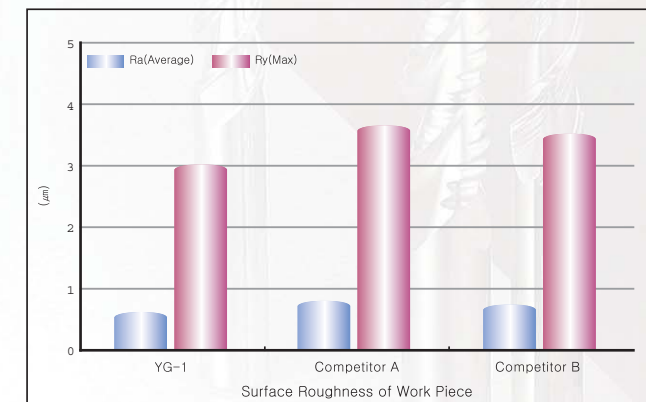

CUTTING CONDITION
Tool : 2 Flute, 45° Helix
Size : $\varnothing 10 \times \varnothing 10 \times 27 \times 70$
Work Material : Aluminum 6061
R.P.M : 7,500 rev./min.
Feed : 2,500 mm/min.
Depth : $A_p(20mm) \times A_e(0.15mm)$
Coolant : Wet Cut

CARBIDE, 1FLUTE

- ▶ Designed to non-ferrous material and non-metal like aluminum and acrylic
- ▶ 1 Flute allows for excellent workpiece finishes and chip evacuation



E5E47 SERIES / PLAIN SHANK

Unit : mm


EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
E5E47020	2.0	3	8	50
E5E47030	3.0	3	12	50
E5E47040	4.0	4	15	60
E5E47050	5.0	5	17	60
E5E47060	6.0	6	20	65
E5E47080	8.0	8	22	65
E5E47100	10.0	10	25	75
E5E47120	12.0	12	30	80

▶ TiN, TiCN-COATING & TiAlN-COATING are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0~-0.03	h6

CARBIDE, 2FLUTE 25° HELIX CORNER RADIUS

- ▶ Designed for the machining aluminum and aluminum alloys, non-ferrous materials
- ▶ Increased tool life and higher cutting accuracy
- ▶ Maximum-metal removal rate
- ▶ Superior chip evacuation
- ▶ Corner Radius for avoiding the chipping
- ▶ Mirror surface - Excellent surface finishes

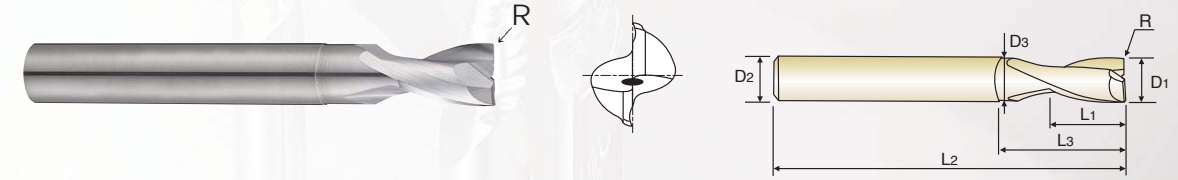

E5930 SERIES / PLAIN SHANK

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
E5930020	RO.2	2.0	3	3	6	40	1.9
E5930030	RO.2	3.0	3	4	8	40	2.9
E5930040	RO.2	4.0	4	5	12	50	3.8
E5930050	RO.2	5.0	5	8	14	50	4.8
E5930060	RO.2	6.0	6	8	18	65	5.7
E5930080	RO.2	8.0	8	10	22	70	7.7
E5930100	RO.2	10.0	10	14	28	80	9.7
E5930120	RO.2	12.0	12	16	35	90	11.5
E5930160	RO.2	16.0	16	20	40	90	15.5
E5930200	RO.2	20.0	20	25	50	100	19.5

▶ TiN, TiCN-COATING & TiAlN-COATING are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0~-0.03	h6

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Acrylic
-HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70							
									◎			◎

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Acrylic
-HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70							
									◎			

CARBIDE, 2FLUTE 45° HELIX SHORT LENGTH

- ▶ Suitable for high speed machining in aluminum and other non-ferrous materials
- ▶ Mirror surface - Excellent surface finishes
- ▶ Superior chip evacuation
- ▶ Reduces chipping of corner edges




E5E48 SERIES / PLAIN SHANK

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
E5E48030	3.0	6	5	50
E5E48040	4.0	6	8	54
E5E48050	5.0	6	9	54
E5E48060	6.0	6	10	54
E5E48080	8.0	8	12	58
E5E48100	10.0	10	14	66
E5E48120	12.0	12	16	73
E5E48140	14.0	14	18	75
E5E48160	16.0	16	22	82
E5E48180	18.0	18	24	84
E5E48200	20.0	20	26	92


▶ TiN, TiCN-COATING & TiAlN-COATING are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0~-0.015	h6

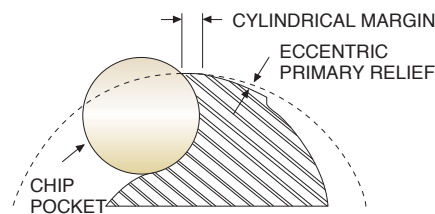

CARBIDE, 2FLUTE 45° HELIX LONG LENGTH

- ▶ Suitable for high speed machining in aluminum and other non-ferrous materials
- ▶ Mirror surface - Excellent surface finishes
- ▶ Superior chip evacuation
- ▶ Reduces chipping of corner edges

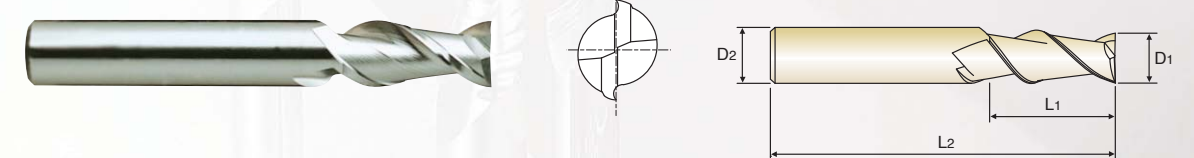


E5522 SERIES / PLAIN SHANK E5521 SERIES / FLAT SHANK

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	D1	D2	L1	L2
E5522030	E5521030	3.0	6	8	57
E5522040	E5521040	4.0	6	11	57
E5522050	E5521050	5.0	6	13	57
E5522060	E5521060	6.0	6	13	57
E5522080	E5521080	8.0	8	19	63
E5522100	E5521100	10.0	10	22	72
E5522120	E5521120	12.0	12	26	83
E5522140	E5521140	14.0	14	26	83
E5522160	E5521160	16.0	16	32	92
E5522180	E5521180	18.0	18	32	92
E5522200	E5521200	20.0	20	38	104

▶ TiN, TiCN-COATING & TiAlN-COATING are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0~-0.015	h6

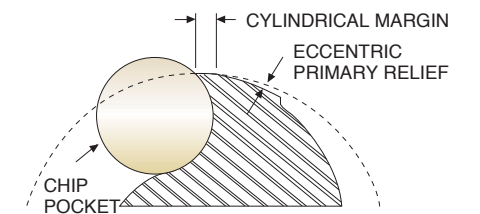

◎ : Excellent ○ : Good


Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Acrylic
-HB225	HB225~325	HRC30~40	HRC40~45	HRC45~55	HRC55~70							
									◎			

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Acrylic
-HB225	HB225~325	HRC30~40	HRC40~45	HRC45~55	HRC55~70							
									◎			

CARBIDE, 2 FLUTE CORNER RADIUS WITH NECK

- ▶ Excellent cutting qualities on aluminum, copper
- ▶ Increased tool life and higher cutting accuracy
- ▶ Mirror surface - Excellent surface finishes

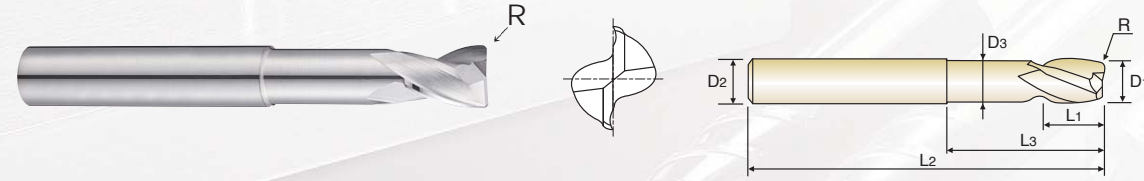

E5909 SERIES / PLAIN SHANK

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R	D1	D2	L1	L3	L2	D3
E5909040	RO.3	4.0	6	5	10	50	3.6
E5909060	RO.5	6.0	6	8	20	60	5.4
E5909080	RO.6	8.0	8	10	30	70	7.2
E5909100	RO.8	10.0	10	12	36	80	9
E5909120	R1.0	12.0	12	14	40	90	11
E5909160	R1.3	16.0	16	18	45	100	14.5
E5909200	R1.6	20.0	20	24	45	100	18

▶ TiN, TiCN-COATING & TiAlN-COATING are available on your request.


Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0~-0.03	h6

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Acrylic
-HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70							
						○			◎			

CARBIDE, 3FLUTE 45° HELIX WITH NECK

- ▶ Excellent cutting qualities on aluminum, copper
- ▶ Increased tool life and higher cutting accuracy
- ▶ Mirror surface - Excellent surface finishes
- ▶ Superior chip evacuation
- ▶ Reduces chipping of corner edges

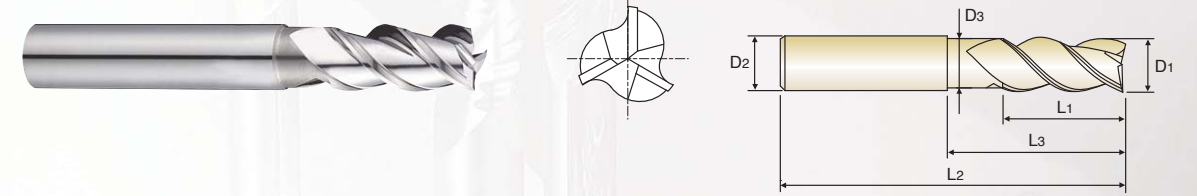


E5E50 SERIES / PLAIN SHANK

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	D1	D2	L1	L3	L2	D3
E5E50030	3.0	6	8	12	57	2.7
E5E50040	4.0	6	11	18	57	3.7
E5E50050	5.0	6	13	18	57	4.7
E5E50060	6.0	6	13	18	57	5.7
E5E50080	8.0	8	21	25	63	7.4
E5E50100	10.0	10	22	30	72	9.2
E5E50120	12.0	12	26	36	83	11
E5E50160	16.0	16	36	42	92	15
E5E50200	20.0	20	41	52	104	19

▶ TiN, TiCN-COATING & TiAlN-COATING are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0~-0.015	h6

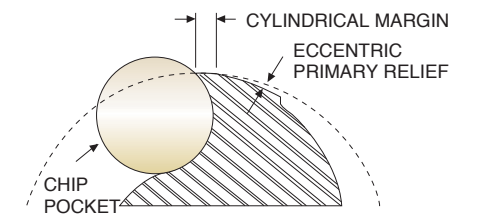


◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Acrylic
-HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70							
									◎			

CARBIDE, 3FLUTE 45° HELIX LONG LENGTH

- ▶ Excellent cutting qualities on aluminum, copper
- ▶ Increased tool life and higher cutting accuracy
- ▶ Mirror surface - Excellent surface finishes
- ▶ Superior chip evacuation
- ▶ Reduces chipping of corner edges

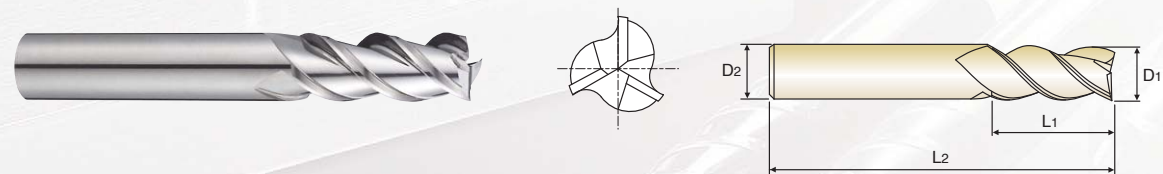


E5E49 SERIES / PLAIN SHANK

Unit : mm

EDP No.	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	D1	D2	L1	L2
E5E49030	3.0	6	12	57
E5E49040	4.0	6	15	57
E5E49050	5.0	6	20	57
E5E49060	6.0	6	20	65
E5E49080	8.0	8	22	65
E5E49100	10.0	10	25	70
E5E49120	12.0	12	25	75
E5E49160	16.0	16	35	90
E5E49200	20.0	20	40	100

▶ TiN, TiCN-COATING & TiAlN-COATING are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0~-0.015	h6

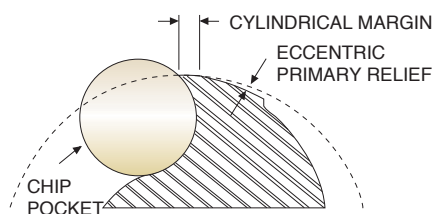


◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Acrylic
-HB225	HB225~325	HRC30~40	HRC40~45	HRC45~55	HRc55~70							
									◎			

CARBIDE, 3FLUTE 45° HELIX LONG LENGTH CORNER RADIUS

- ▶ Excellent cutting qualities on aluminum, copper
- ▶ Increased tool life and higher cutting accuracy
- ▶ Mirror surface - Excellent surface finishes
- ▶ Superior chip evacuation

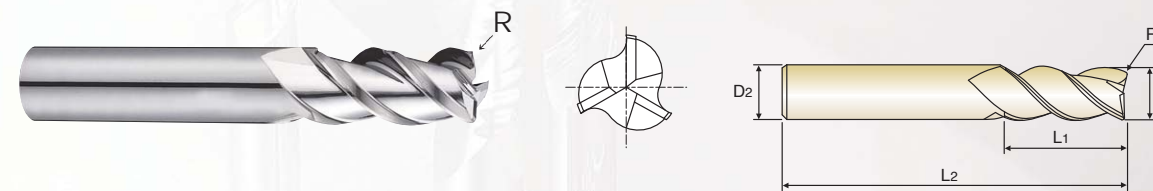


E5E51 SERIES / PLAIN SHANK

Unit : mm

EDP No.	Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
	R	D1	D2	L1	L2
E5E51030	R0.5	3.0	6	12	57
E5E51901	R1.0	3.0	6	12	57
E5E51040	R0.5	4.0	6	15	57
E5E51902	R1.0	4.0	6	15	57
E5E51050	R0.5	5.0	6	20	57
E5E51903	R1.0	5.0	6	20	57
E5E51060	R0.5	6.0	6	20	65
E5E51904	R1.0	6.0	6	20	65
E5E51080	R0.5	8.0	8	22	65
E5E51905	R1.0	8.0	8	22	65
E5E51100	R0.5	10.0	10	25	70
E5E51906	R1.0	10.0	10	25	70
E5E51907	R2.0	10.0	10	25	70
E5E51120	R0.5	12.0	12	25	75
E5E51908	R1.0	12.0	12	25	75
E5E51909	R2.0	12.0	12	25	75
E5E51160	R0.5	16.0	16	35	90
E5E51910	R1.0	16.0	16	35	90
E5E51911	R2.0	16.0	16	35	90
E5E51200	R0.5	20.0	20	40	100
E5E51912	R1.0	20.0	20	40	100
E5E51913	R2.0	20.0	20	40	100

▶ TiN, TiCN-COATING & TiAlN-COATING are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0~-0.015	h6


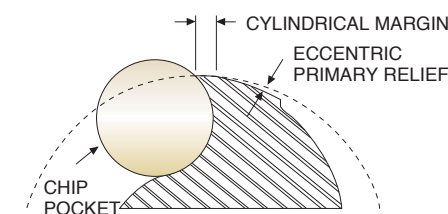


◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Acrylic
-HB225	HB225~325	HRC30~40	HRC40~45	HRC45~55	HRc55~70							
									◎			

CARBIDE, 2FLUTE 50° HELIX BALL NOSE WITH NECK

- ▶ Excellent cutting qualities on aluminum, copper
- ▶ Increased tool life and higher cutting accuracy

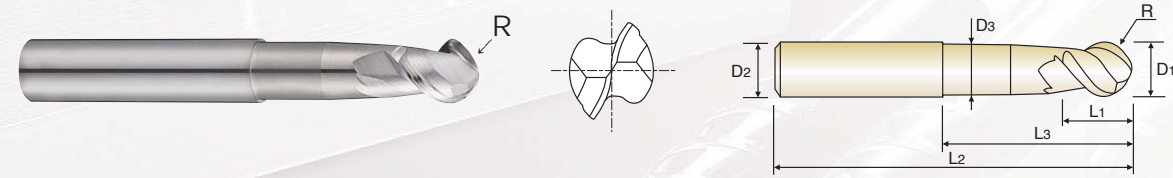

E5910 SERIES / PLAIN SHANK

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.01)	D1	D2	L1	L3	L2	D3
E5910060	R3.0	6.0	6	5.5	25	55	5.4
E5910080	R4.0	8.0	8	7	30	65	7.2
E5910100	R5.0	10.0	10	8.5	35	75	9
E5910120	R6.0	12.0	12	10.5	40	75	11
E5910160	R8.0	16.0	16	14	50	90	14.5
E5910200	R10.0	20.0	20	17	50	100	18

▶ TiN, TiCN-COATING & TiAlN-COATING are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
±0.02	h6

CARBIDE, 3FLUTE 40° HELIX BALL NOSE WITH NECK

- ▶ Excellent cutting qualities on aluminum, copper
- ▶ Increased tool life and higher cutting accuracy
- ▶ Mirror surface - Excellent surface finishes



E5908 SERIES / PLAIN SHANK

Unit : mm

EDP No.	Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
	R (±0.01)	D1	D2	L1	L3	L2	D3
E5908020	R1.0	2.0	6	3	5	60	1.9
E5908025	R1.25	2.5	6	4	6	60	2.4
E5908030	R1.5	3.0	6	4.5	6.5	60	2.8
E5908035	R1.75	3.5	6	5	7	65	3.2
E5908040	R2.0	4.0	6	6	8	65	3.7
E5908050	R2.5	5.0	6	7.5	10	65	4.6
E5908060	R3.0	6.0	6	9	12	75	5.6
E5908080	R4.0	8.0	8	12	25	75	7.4
E5908100	R5.0	10.0	10	15	30	80	9.4
E5908120	R6.0	12.0	12	18	36	90	11.4
E5908160	R8.0	16.0	16	24	40	100	15.4

▶ TiN, TiCN-COATING & TiAlN-COATING are available on your request.

Mill Dia. Tolerance(mm)	Shank Dia. Tolerance
0--0.03	h6

◎ : Excellent ○ : Good


Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Acrylic
-HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70							
						○			◎			

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Acrylic
-HB225	HB225~325	HRc30~40	HRc40~45	HRc45~55	HRc55~70							
						○			◎			

CARBIDE, 3FLUTE LONG LENGTH ROUGHING

- ▶ Excellent cutting qualities on aluminum, copper
- ▶ Increased tool life and superior chip evacuation
- ▶ Reduces chipping of corner edges



▶ E5742 SERIES / PLAIN SHANK

▶ E5711 SERIES / FLAT SHANK

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	D1(h10)	D2(h6)	L1	L2
E5742060	E5711060	6.0	6	16	57
E5742070	E5711070	7.0	8	16	63
E5742080	E5711080	8.0	8	16	63
E5742090	E5711090	9.0	10	19	72
E5742100	E5711100	10.0	10	22	72
E5742120	E5711120	12.0	12	26	83
E5742140	E5711140	14.0	14	26	83
E5742160	E5711160	16.0	16	32	92
E5742180	E5711180	18.0	18	32	92
E5742200	E5711200	20.0	20	38	104
E5742250	E5711250	25.0	25	45	121


▶ TiN, TiCN-COATING & TiAlN-COATING are available on your request.

Tolerances according to DIN 7160 & 7161

	Tolerance range in μm				
	Nominal-Diameter in mm				
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30
h10	0 -40	0 -48	0 -58	0 -70	0 -84
h6	0 -6	0 -8	0 -9	0 -11	0 -13

CARBIDE, 3FLUTE ROUGHING WITH NECK

- ▶ Excellent cutting qualities on aluminum, copper
- ▶ Increased tool life and superior chip evacuation

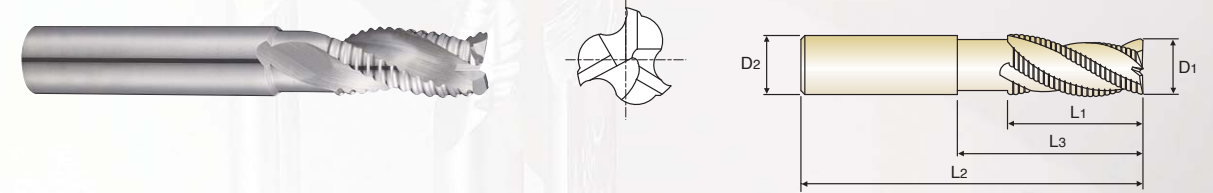

▶ E5E39 SERIES / PLAIN SHANK

▶ E5E40 SERIES / FLAT SHANK

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
PLAIN	FLAT	D1	D2	L1	L3	L2	D3
E5E39060	E5E40060	6.0	6	16	20	57	5
E5E39080	E5E40080	8.0	8	16	25	63	7
E5E39100	E5E40100	10.0	10	22	30	72	9
E5E39120	E5E40120	12.0	12	26	36	83	10.5
E5E39160	E5E40160	16.0	16	32	42	92	14.5
E5E39200	E5E40200	20.0	20	38	52	104	18.5

▶ TiN, TiCN-COATING & TiAlN-COATING are available on your request.

Tolerances according to DIN 7160 & 7161

	Tolerance range in μm				
	Nominal-Diameter in mm				
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30
h10	0 -40	0 -48	0 -58	0 -70	0 -84
h6	0 -6	0 -8	0 -9	0 -11	0 -13

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Acrylic
-HB225	HB225-325	HRC30-40	HRC40-45	HRC45-55	HRC55-70							
○	○							○	◎			

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Acrylic
-HB225	HB225-325	HRC30-40	HRC40-45	HRC45-55	HRC55-70							
○	○							○	◎			

YPM, 3FLUTE 42° HELIX SHORT LENGTH ROUGHING TiAIN COATED

- ▶ Maximum metal removal rate at High Speed Condition
- ▶ Reduces vibrations and improves surface roughness
- ▶ Reduces chipping of corner edges



▶ EP922 SERIES / PLAIN SHANK ▶ EP923 SERIES / FLAT SHANK

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut		Overall Length
PLAIN	FLAT	D1(js12)	D2(h6)	L1	L2	
EP922120	EP923120	12.0	12	26	83	
EP922140	EP923140	14.0	12	26	83	
EP922160	EP923160	16.0	16	32	92	
EP922180	EP923180	18.0	16	32	92	
EP922200	EP923200	20.0	20	38	104	
EP922220	EP923220	22.0	20	38	104	
EP922250	EP923250	25.0	25	45	121	
EP922280	EP923280	28.0	25	45	121	
EP922320	EP923320	32.0	32	53	133	

Tolerances according to DIN 7160 & 7161

	Tolerance range in μm					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
js12	± 50	± 60	± 75	± 90	± 105	± 125
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16

◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Acrylic
-HB225	HB225~325	HRC30~40	HRC40~45	HRC45~55	HRC55~70							
								○	◎			

YPM, 3FLUTE 42° HELIX LONG LENGTH ROUGHING TiAIN COATED

- ▶ Maximum metal removal rate at High Speed Condition
- ▶ Reduces vibrations and improves surface roughness
- ▶ Reduces chipping of corner edges



▶ EP924 SERIES / PLAIN SHANK ▶ EP925 SERIES / FLAT SHANK

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut		Overall Length
PLAIN	FLAT	D1(js12)	D2(h6)	L1	L2	
EP924120	EP925120	12.0	12	53	110	
EP924140	EP925140	14.0	12	53	110	
EP924160	EP925160	16.0	16	63	123	
EP924180	EP925180	18.0	16	63	123	
EP924200	EP925200	20.0	20	75	141	
EP924220	EP925220	22.0	20	75	141	
EP924250	EP925250	25.0	25	90	166	
EP924280	EP925280	28.0	25	90	166	
EP924320	EP925320	32.0	32	106	186	

Tolerances according to DIN 7160 & 7161

	Tolerance range in μm					
	Nominal-Diameter in mm					
	from 1 to 3	over 3 to 6	over 6 to 10	over 10 to 18	over 18 to 30	over 30 to 50
js12	± 50	± 60	± 75	± 90	± 105	± 125
h6	0 -6	0 -8	0 -9	0 -11	0 -13	0 -16


◎ : Excellent ○ : Good

Carbon Steels	Alloy Steels	Prehardened Steels	Hardened Steels		High Hardened Steels	Copper	Graphite	Cast Iron	Aluminum	Stainless Steels	Titanium	Acrylic
-HB225	HB225~325	HRC30~40	HRC40~45	HRC45~55	HRC55~70							
								○	◎			

CARBIDE, 1FLUTE

E5E47 SERIES

MATERIAL	ACRYLIC				ALUMINUM ALUMINUM ALLOY				
	DIAMETER	RPM	FEED	Vc	Fz	RPM	FEED	Vc	Fz
2.0	32000	2200	200	0.069	0.069	23000	1500	145	0.065
3.0	25000	2400	235	0.096	0.096	18000	1700	170	0.094
4.0	20000	2400	250	0.120	0.120	15000	1800	190	0.120
5.0	15000	2200	235	0.147	0.147	12000	1800	190	0.150
6.0	13500	2300	255	0.170	0.170	10000	1800	190	0.180
8.0	10000	2400	250	0.240	0.240	7800	1900	195	0.244
10.0	8000	2400	250	0.300	0.300	6000	2000	190	0.333
12.0	6700	2300	255	0.343	0.343	5000	2200	190	0.440





RPM = rev./min.
FEED = mm/min.
Vc = m/min.
Fz = mm/t

CARBIDE, 2FLUTE 25° HELIX CORNER RADIUS

E5930 SERIES

MATERIAL	ALUMINUM ALUMINUM ALLOY								
	DIAMETER	RPM	FEED	Vc	Fz	RPM	FEED	Vc	Fz
2.0	10400	460	65	0.022	0.022	10400	810	65	0.039
3.0	10400	720	100	0.035	0.035	10400	960	100	0.046
4.0	10400	960	130	0.046	0.046	10400	1120	130	0.054
5.0	10400	1040	165	0.050	0.050	10400	1360	165	0.065
6.0	10400	1200	195	0.058	0.058	10400	1600	195	0.077
8.0	8000	1440	200	0.090	0.090	8000	1840	200	0.115
10.0	8000	1760	250	0.110	0.110	8000	2160	250	0.135
12.0	8000	2160	300	0.135	0.135	8000	2720	300	0.170
16.0	6400	2000	320	0.156	0.156	6400	2480	320	0.194
20.0	4000	1600	250	0.200	0.200	4000	2000	250	0.250





A : $\varnothing 2 \sim \varnothing 10 = 0.25 \times D$
 $\varnothing 12 \sim \varnothing 20 = 0.5 \times D$

RPM = rev./min.
FEED = mm/min.
Vc = m/min.
Fz = mm/t

CARBIDE, 2FLUTE CORNER RADIUS WITH NECK



E5909 SERIES

MATERIAL	ALUMINUM ALUMINUM ALLOY								
	DIAMETER	RPM	FEED	Vc	Fz	RPM	FEED	Vc	Fz
4.0	10400	960	130	0.046	0.046	10400	1120	130	0.054
6.0	10400	1200	195	0.058	0.058	10400	1600	195	0.077
8.0	8000	1440	200	0.090	0.090	8000	1840	200	0.115
10.0	8000	1760	250	0.110	0.110	8000	2160	250	0.135
12.0	8000	2160	300	0.135	0.135	8000	2720	300	0.170
16.0	6400	2000	320	0.156	0.156	6400	2480	320	0.194
20.0	4000	1600	250	0.200	0.200	4000	2000	250	0.250



A : $\sim \varnothing 10 = 0.25D$
 $\varnothing 12 \sim \varnothing 20 = 0.5D$

MATERIAL	COPPER ALLOY								
	DIAMETER	RPM	FEED	Vc	Fz	RPM	FEED	Vc	Fz
4.0	3120	240	40	0.038	0.038	3120	280	40	0.045
6.0	3120	305	60	0.049	0.049	3120	400	60	0.064
8.0	2400	360	60	0.075	0.075	2400	465	60	0.097
10.0	2400	440	75	0.092	0.092	2400	545	75	0.114
12.0	2400	545	90	0.114	0.114	2400	680	90	0.142
16.0	1920	505	95	0.132	0.132	1920	625	95	0.163
20.0	1200	400	75	0.167	0.167	1200	505	75	0.210





A : $\sim \varnothing 10 = 0.25D$
 $\varnothing 12 \sim \varnothing 20 = 0.5D$

RPM = rev./min.
FEED = mm/min.
Vc = m/min.
Fz = mm/t

CARBIDE, 2FLUTE 45° HELIX

E5E48, E5522, E5521 SERIES

MATERIAL	ALUMINUM ALUMINUM ALLOY								
	DIAMETER	RPM	FEED	Vc	Fz	RPM	FEED	Vc	Fz
3.0	10000	700	95	0.035	10000	900	95	0.045	
4.0	10000	900	125	0.045	10000	1100	125	0.055	
5.0	10000	1000	155	0.050	10000	1300	155	0.065	
6.0	10000	1200	190	0.060	10000	1500	190	0.075	
8.0	8000	1400	200	0.088	8000	1800	200	0.113	
10.0	8000	1700	250	0.106	8000	2100	250	0.131	
12.0	8000	2100	300	0.131	8000	2600	300	0.163	
14.0	6000	1800	265	0.150	6000	2200	265	0.183	
16.0	6000	1900	300	0.158	6000	2400	300	0.200	
18.0	4000	1400	225	0.175	4000	1800	225	0.225	
20.0	4000	1600	250	0.200	4000	1900	250	0.238	





A : $\varnothing 3 \sim \varnothing 10 = 0.25 \times D$
 $\varnothing 12 \sim \varnothing 20 = 0.5 \times D$

RPM = rev./min.
 FEED = mm/min.
 Vc = m/min.
 Fz = mm/t

CARBIDE, 3FLUTE 45° HELIX CORNER RADIUS

E5E51 SERIES

MATERIAL	ALUMINUM ALUMINUM ALLOY								
	DIAMETER	RPM	FEED	Vc	Fz	RPM	FEED	Vc	Fz
3.0	10000	1490	95	0.050	10000	1160	95	0.039	
4.0	10000	1820	125	0.061	10000	1490	125	0.050	
5.0	10000	2150	155	0.072	10000	1650	155	0.055	
6.0	10000	2480	190	0.083	10000	1980	190	0.066	
8.0	8000	3000	200	0.125	8000	2310	200	0.096	
10.0	8000	3470	250	0.145	8000	2810	250	0.117	
12.0	8000	4290	300	0.179	8000	3470	300	0.145	
16.0	6000	3960	300	0.220	6000	3140	300	0.174	
20.0	4000	3140	250	0.262	4000	2640	250	0.220	





RPM = rev./min.
 FEED = mm/min.
 Vc = m/min.
 Fz = mm/t

CARBIDE, 3FLUTE 45° HELIX

E5E49, E5E50 SERIES

MATERIAL	ALUMINUM ALUMINUM ALLOY								
	DIAMETER	RPM	FEED	Vc	Fz	RPM	FEED	Vc	Fz
3.0	7000	940	65	0.045	7000	730	65	0.035	
4.0	7000	1150	90	0.055	7000	940	90	0.045	
5.0	7000	1360	110	0.065	7000	1050	110	0.050	
6.0	7000	1580	130	0.075	7000	1250	130	0.060	
8.0	5600	1900	140	0.113	5600	1470	140	0.088	
9.0	5600	2050	160	0.122	5600	1630	160	0.097	
10.0	5600	2200	175	0.131	5600	1780	175	0.106	
12.0	5600	2740	210	0.163	5600	2200	210	0.131	
16.0	4200	2520	210	0.200	4200	1990	210	0.158	
20.0	2800	2000	175	0.238	2800	1680	175	0.200	





RPM = rev./min.
 FEED = mm/min.
 Vc = m/min.
 Fz = mm/t

CARBIDE, 3FLUTE ROUGHING

E5E39, E5E40, E5742, E5711 SERIES

MATERIAL	ALUMINUM ALUMINUM ALLOY								
	DIAMETER	RPM	FEED	Vc	Fz	RPM	FEED	Vc	Fz
6.0	13500	6800	254	0.168	10500	5300	198	0.168	
8.0	10500	5300	264	0.168	8000	4000	201	0.167	
10.0	8500	4300	267	0.169	6500	3500	204	0.179	
12.0	8500	4200	320	0.165	6400	3200	241	0.167	
16.0	6400	3200	322	0.167	4800	2400	241	0.167	
20.0	5100	2500	320	0.163	3850	1900	242	0.165	




RPM = rev./min.
 FEED = mm/min.
 Vc = m/min.
 Fz = mm/t

CARBIDE, 2 FLUTE 50° HELIX BALL NOSE

E5910 SERIES

MATERIAL	ALUMINUM ALUMINUM ALLOY				COPPER ALLOY				
	DIAMETER	RPM	FEED	Vc	Fz	RPM	FEED	Vc	Fz
R3.0 x 6.0	14400	1400	270	0.049	4400	350	85	0.040	
R4.0 x 8.0	11200	1600	280	0.071	3360	400	85	0.060	
R5.0 x 10.0	11200	1880	350	0.084	3360	465	105	0.069	
R6.0 x 12.0	11200	2400	420	0.107	3360	600	125	0.089	
R8.0 x 16.0	8800	2160	440	0.123	2640	535	135	0.101	
R10.0 x 20.0	5600	1760	350	0.157	1680	440	105	0.131	


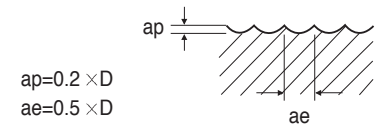


RPM = rev./min.
FEED = mm/min.
Vc = m/min.
Fz = mm/t

YPM, 3FLUTE 42° HELIX ROUGHING TiAlN COATED

EP922, EP923, EP924, EP925 SERIES

MATERIAL	ALUMINUM ALUMINUM ALLOY								
	DIAMETER	RPM	FEED	Vc	Fz	RPM	FEED	Vc	Fz
12.0	2800	550	105	0.065	2800	410	105	0.049	
14.0	2500	600	110	0.080	2500	450	110	0.060	
16.0	2200	625	110	0.095	2200	465	110	0.070	
18.0	1950	680	110	0.116	1950	510	110	0.087	
20.0	1700	700	105	0.137	1700	525	105	0.103	
22.0	1600	685	110	0.143	1600	515	110	0.107	
25.0	1400	625	110	0.149	1400	465	110	0.111	
28.0	1250	675	110	0.180	1250	505	110	0.135	
32.0	1100	700	110	0.212	1100	525	110	0.159	




RPM = rev./min.
FEED = mm/min.
Vc = m/min.
Fz = mm/t

CARBIDE, 3 FLUTE 40° HELIX BALL NOSE

E5908 SERIES

MATERIAL	ALUMINUM ALUMINUM ALLOY				COPPER ALLOY				
	DIAMETER	RPM	FEED	Vc	Fz	RPM	FEED	Vc	Fz
R1.0 x 2.0	21600	760	135	0.018	6400	190	40	0.015	
R1.25 x 2.5	17600	760	140	0.022	5200	190	40	0.018	
R1.5 x 3.0	14400	760	135	0.026	4400	190	40	0.022	
R1.75 x 3.5	14400	800	160	0.028	4400	190	50	0.022	
R2.0 x 4.0	14400	1000	180	0.035	4400	250	55	0.028	
R2.5 x 5.0	14400	1080	225	0.038	4400	270	70	0.031	
R3.0 x 6.0	14400	1400	270	0.049	4400	350	85	0.040	
R4.0 x 8.0	11200	1600	280	0.071	3360	400	85	0.060	
R5.0 x 10.0	11200	1880	350	0.084	3360	465	105	0.069	
R6.0 x 12.0	11200	2400	420	0.107	3360	600	125	0.089	
R8.0 x 16.0	8800	2160	440	0.123	2640	535	135	0.101	

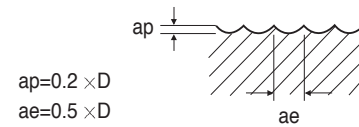

RPM = rev./min.
FEED = mm/min.
Vc = m/min.
Fz = mm/t